


## ANO Mic1.32DS

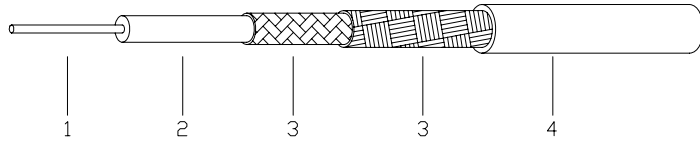

### Construction Specification

	Material	Diameter(mm)
1.Inner Conductor	Silver Plated Copper	7X0.08
2.Dielectric	FEP	0.68
3.Outer Conductor	Double Tin Plated Copper Braid	1.10
4.Jacket	FEP	1.32

### Electrical Characteristics

Capacitance(PF/m)	100
Impedance(ohm)	50
Velocity(%)	70
Bending Radius(mm)	4
Max.Oper Voltage(VMS)	1000
Max.Oper Frequency(MHz)	6000
Operating Temp(°C)	-55 to +200

### Attenuation

Frequency(MHz)	Attenuation (dB/100m)
1000	240
2000	330
3000	400
4000	460
5000	510
6000	560