


## ANO FLL335\_LSZH

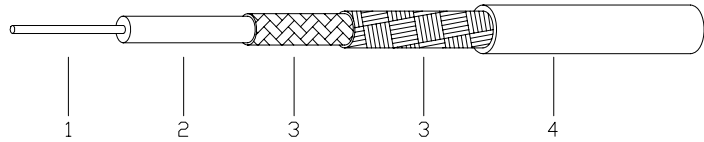

Construction Specification		
	Material	Diameter(mm)
1.Inner Conductor	Silver Plated Copper	2.20
2.Dielectric	Physical Foam Polyethylene	6.20
3.Outer Conductor	Double Copper Braid	7.30
4.Jacket	LSZH Black PE	8.50

Electrical Characteristics	
Capacitance(PF/m)	85.5
Impedance(ohm)	50
Max. Operating Voltage(kv)	2
Velocity(%)	80

Mechanical and Environmental Characteristics	
Operating Temp(°C)	-40 to +80
Min. Bending Radius Static(mm)	42
Min. Bending Radius Repeated(mm)	64

Attenuation & Average Power @ 20°C and Seal Level	
Frequency(MHz)	Attenuation(dB/m)
500	0.14
1000	0.21
2000	0.32
2500	0.38