

REVISIONS			
REV.	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	07/08/25	J Q

MATERIAL & FINISH:
1 BODY: BRASS, NICKEL PLATED
2 CENTER CONTACT: PHOSPHOR BRONZE, GOLD PLATED
3 COUPLING NUT: BRASS, NICKEL PLATED
4 RETAINING RING: PHOSPHOR BRONZE, UNPLATED
5 CRIMP FERRULE: COPPER, NICKEL PLATED
6 INSULATOR: PTFE
7 GASKET: SILICONE RUBBER


ELECTRICAL DATA:
1 IMPEDANCE: 50 Ω
2 FREQUENCY RANGE: DC~6 GHz
3 VSWR: 1.20 MAX. AT DC~3 GHz
1.30 MAX. AT 3~6 GHz

ENVIRONMENTAL DATA:
1 TEMPERATURE RANGE: -65℃~+165℃
2 2011/65/EU(RoHS) AND 2015/863/(RoHS): COMPLIANT
3 REACH SVHC247: COMPLIANT

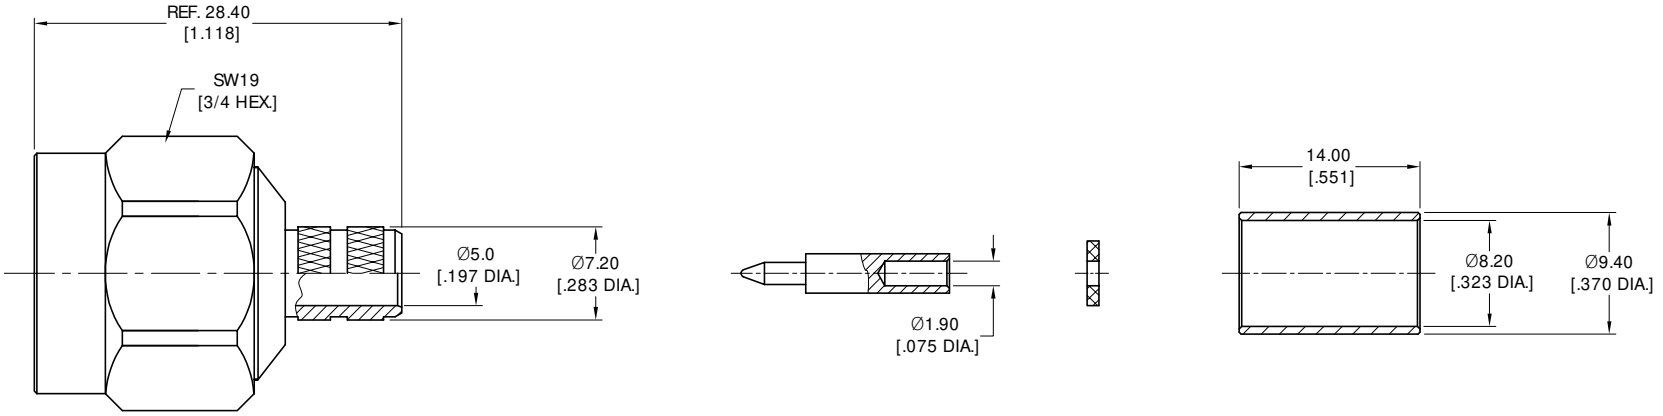



CABLE STRIPPING DIMENSIONS



CRIMP WIDTH: 12.7 [.50]

DRAWN	X. Y	DATE	07/08/25
CHECKED	W. Y	DATE	07/08/25
APPROVED	J Q	DATE	07/08/25

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS, DIMENSIONS IN [ ] ARE IN INCHES FOR CUSTOMER REFERENCE ONLY UNLESS OTHERWISE SPECIFIED TOLERANCE ARE:

.XX	±0.13 [.005"]
.X	±0.20 [.008"]
X	±0.50 [.019"]
.X°	±1°
X°	±2°

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ANOISON ELECTRONICS LTD AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION COPYRIGHT © 2025 ANOISON ELECTRONICS LTD

ANOISON

TITLE: N STRAIGHT MALE CRIMP FOR LMR300 CABLE

VIEW

PART NO.: ANO 5111-2221

SIZE	SCALE	SHEET	REV.
A3	4:1	1/1	A