MATERIAL & FINISH:

1 BODY: BRASS, GOLD PLATED
2 CENTER CONTACT: BERYLLIUM COPPER ALLOY, GOLD PLATED
3 SPRING LATCH: BERYLLIUM COPPER ALLOY, GOLD PLATED
4 INSULATOR: PTFE

ENVIRONMENTAL DATA:


1 TEMPERATURE RANGE: -40℃~+125℃
2 2011/65/EU(RoHS) AND 2015/863/(RoHS): COMPLIANT
3 1999/2006/EC(REACH): COMPLIANT

ELECTRICAL DATA:

1 IMPEDANCE: 50 Ω
2 FREQUENCY RANGE: DC~67 GHz
3 VSWR: 1.35 MAX. @ DC~28 GHz
1.45 MAX. @ 28~40 GHz
1.93 MAX. @ 40~60 GHz

4 AVERAGE POWER: 0.25 WATTS TO 25°C AMBIENT TEMPERATRUE, DERATED LINEARLY TO 0 W @ 125°C

REVISIONS			
REV.	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	10/20/25	J. Q

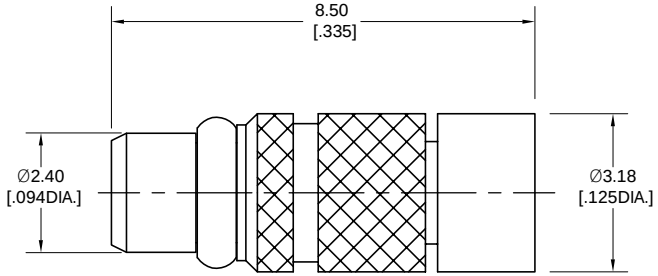

*MMPX is a registered trademark of HUBER+SUHNER AG.

DRAWN	W. Y	DATE	10/20/25
CHECKED	X. Y	DATE	10/20/25
APPROVED	J. Q	DATE	10/20/25

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS, DIMENSIONS IN [ ] ARE IN INCHES FOR CUSTOMER REFERENCE ONLY UNLESS OTHERWISE SPECIFIED TOLERANCE ARE:

.XX	±0.13 [.005"]
.X	±0.20 [.008"]
X	±0.50 [.019"]
.X°	±1°
X°	±2°

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ANOISON ELECTRONICS LTD AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION COPYRIGHT © 2025 ANOISON ELECTRONICS LTD

ANOISON

TITLE: COAXIAL TERMINATION, MMCX65(MMPX Style) MALE, 0.25 WATTS, DC~67 GHz

VIEW

PART NO.: ANO 775-101

SIZE	SCALE	SHEET	REV.
A3	10:1	1/1	A