
1.0 MATERIAL & FINISH
1.1 BODY: BRASS C36000, SEE TABLE
1.2 CENTER CONTACT: BERYLLIUM COPPER C17300, GOLD 0.1 MIN. μM OVER NICKEL, 2~4 μM
1.3 WASHER: BERYLLIUM COPPER C17300, SEE TABLE
1.4 FASTENING NUT: BRASS C36000, SEE TABLE
1.5 INSULATOR: PTFE


2.0 ENVIRONMENTAL DATA:
2.1 TEMPERATURE RANGE: -55℃~+125℃
2.2 2011/65/EU (RoHS): COMPLIANT
2.3 INTERFACE: MIL-STD-348A, FIG.3102
2.4 PACKAGING: 50 PCS/TRAY


3.0 ELECTRICAL DATA:
3.1 IMPEDANCE: 50 Ω
3.2 FREQUENCY RANGE: DC~6 GHz

REVISIONS			
REV.	DESCRIPTION	DATE	APPROVED
D	FINISH CHANGED	04/02/15	J. QU
E	DRAWING FORMAT CHANGED	08/02/17	J. QU

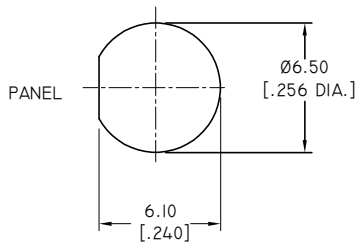


RECOMMNDED MOUNTING HOLE

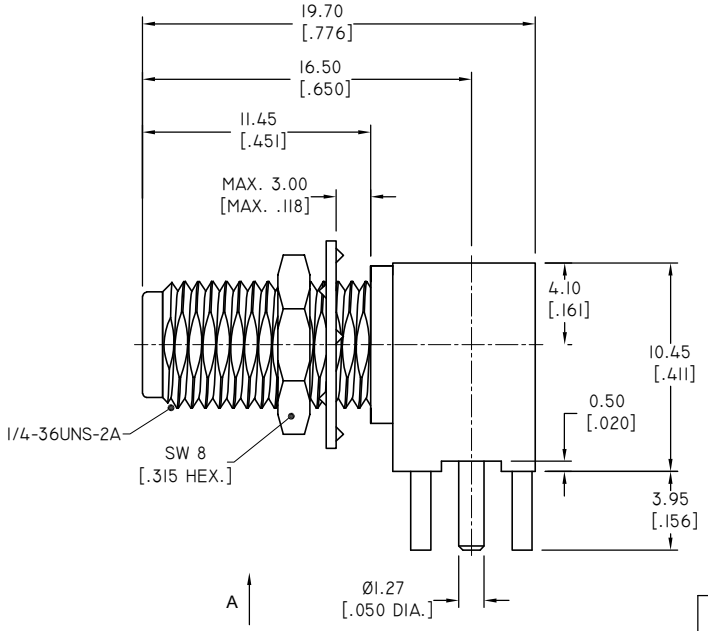


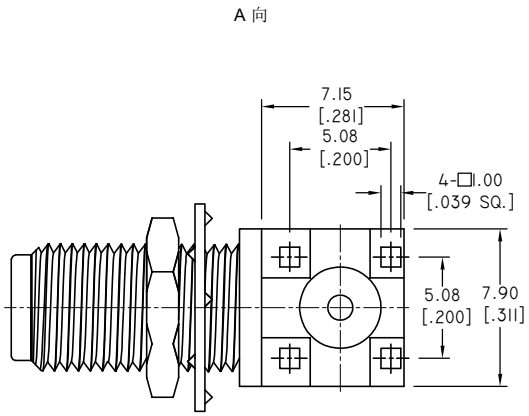


PART NO.	PART	FINISH
ANO 2122-4128	BODY/FASTENING NUT/ LOCK WASHER	GOLD 0.1 MIN. μM OVER NICKEL, 2~4 μM
ANO 2122-4128A		ALBALOY 2.5 MIN. μM

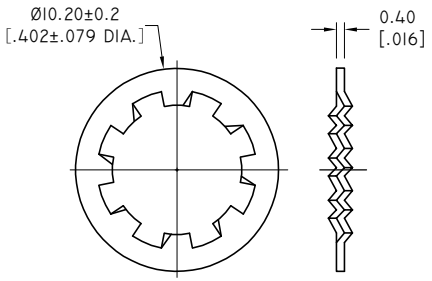

WASHER



NUT



DRAWN	P. CHEN	DATE 08/02/17
CHECKED	L. YANG	DATE 08/02/17
APPROVED	J. QU	DATE 08/02/17

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS, DIMENSIONS IN [ ] ARE IN INCHES FOR CUSTOMER REFERENCE ONLY UNLESS OTHERWISE SPECIFIED TOLERANCE ARE:

.XX	±0.13 [.005"]
.X	±0.20 [.008"]
X	±0.50 [.019"]
.X°	±1°
X°	±2°

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ANOISON ELECTRONICS LTD AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION COPYRIGHT © 2017 ANOISON ELECTRONICS LTD

ANOISON

TITLE
SMA R/A BULKHEAD FEMALE, PCB RECEPTACLE

VIEW

PART NO.
ANO 2122-4128

SIZE	SCALE	SHEET	REV.
A3	4:1	1/1	E